


26MRT ROUGH TERRAIN SCISSOR LIFT



26MRT

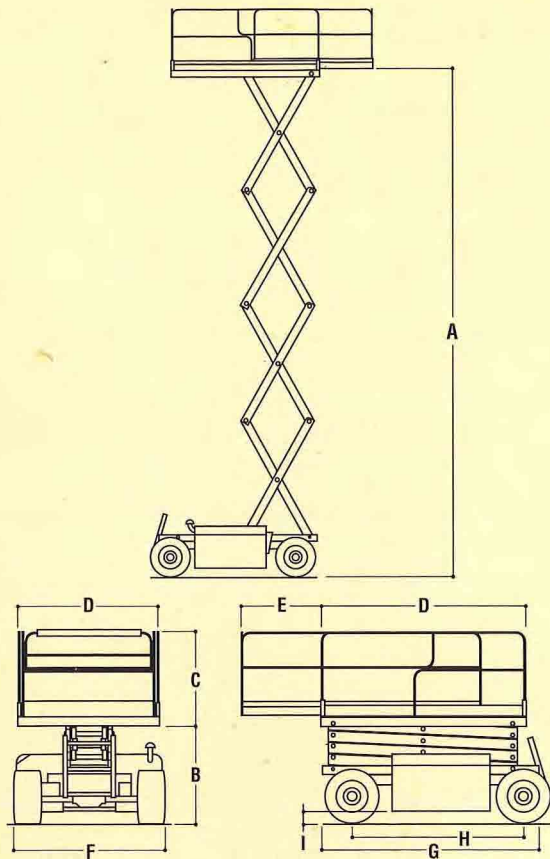

DIMENSIONAL DATA

A. Platform Height Elevated	7.92 m (26 ft.)
B. Platform Height Lowered	1.33 m (4 ft 4 1/2 in.)
C. Railing Height	1.1 m (3 ft 7 1/2 in.)
B+C. Overall Height	2.43 m (8 ft 0 in.)
D. Platform Dimensions	1.63 m x 2.39 m (5 ft 4 in. x 7 ft 10 in.)
E. Deck Extension	0.91 m (3 ft.)
F. Overall Width	1.75 m (5 ft. 9 in.)
G. Overall Length	2.73 m (8 ft. 11 1/2 in.)
H. Wheelbase	1.98 m (6 ft 6 in.)
I. Ground Clearance	17 cm (6 3/4 in.)
Capacity	454 kgs (1000 lbs.)
Capacity on Deck Extension	120 kgs (265 lbs.)
Lift/Lower Speed	38/35 sec.
Maximum Drive Height	7.92 m (26 ft.)
Platform Material	Steel Tread Plate

CHASSIS

Drive Speed	7.2 kph (4.5 mph.)
Gradeability	25%
Turning Radius (inside)	2.46 m (8 ft. 1 in.)
Turning Radius (outside)	4.67m (15 ft. 4 in.)
Tyre Size	10.5 x 15
Tyre Type	Lug Tread
Brakes	2 Wheel Drum

POWER SYSTEM

Engine	Yanmar 16 kw watercooled, 3-cylinder
Fuel Tank Capacity	29.5 L (7.8 gal)
Hydraulic Reservoir	56.8 L (15 gal)
Gross Vehicle Weight	3,030kgs (6675 lbs.)

3007

N.B Dimensions and Specs shown above with optional Euro Specification.

PERFORMANCE FEATURES

High-Traction, Two-Wheel Drive Improves Rough Terrain Performance

A standard, no-spin differential drive train delivers exceptional traction for off-slab drive performance. The powerful hydraulic drive motor delivers 25% gradeability, with a 7.2 kph (4.5 mph) drive speed for improved mobility between work locations. Automatic brakes are spring applied and hydraulically released.



Big Machine Performance in a Compact Design

Measuring 1.75 m (5 ft. 9 in.) wide and 2.43 m (8 ft. 0 in.) high in the stowed position, the Model 26MRT's compact size allows versatility for off-slab use on rough terrain or inside buildings in narrow aisles.

